



# **MVB6S** 2 IN 1 Processor

Specifications V3.4

# 1 Product Overview

## Product Introduction

MVB6S is a professional led display controller that has integrated the video splicing and the sending processing with powerful video signal receiving, splicing and processing abilities. The maximum loading capacity could reach up to 3.9 million pixels. It supports 2x HDMI and 1x DVI, 1x DP and 1x VGA signal, a seamless switching between multiple signals could be easily realized; it supports arbitrarily splicing, and it could support maximum 8 images to be displayed simultaneously.

MVB6S has 6x Gigabyte Ethernet Output Ports and a series of rich & useful functions, it provides a flexible controlling of the display with high quality of the images, it is suitable for all kinds of displays with different standards.

## Application Scenarios

It is suitable for various application scenarios such as small and medium-sized LED displays in shopping malls, hotels, exhibitions, and TV studios.



## 2 Function Introduction

---

- ✧ Full Digital HD Interfaces,DVIX1,HDMIx2, DPx1,VGAx1,Audiox1.
- ✧ It supports 4K@30HZ, Full Size(Pixel to Pixel) Display.
- ✧ It has 6x Gigabyte Ethernet Output Ports.
- ✧ The maximum loading capacity could reach up to 3.9 million pixels, the widest pixel is up to 8192 and highest could reach up to 3840 pixels,the output resolution could be customized.
- ✧ It supports to freely switch the video sources and get the scale of the led display.
- ✧ It supports to get 4 images on the screen, the images could be superimposed,roamed g and scaled. If output resolution width greater than 4096, only single screen display
- ✧ The video source could be freely cropped and partially enlarged.
- ✧ The positions and sizes of the images could be freely adjusted.
- ✧ It supports to lock the screen with the buttons on the processor
- ✧ It supports a USB upgrading.
- ✧ The preset templates can be saved and loaded.
- ✧ To turn the screen to the black sate by pressing the button on the processor.
- ✧ Scheduled Task List supported.
- ✧ Built in self testing tool .

- ✧ Freely switch between the audio and video, the volume could be adjusted.


# 3 Product Parameters

## Basic Parameters

Loading Capacity	1 Network Port	650 thousand pixels
	1 unit ( entire unit)	3.9 million pixels
The Widest Pixels	8192	
The Highest Pixels	3840	

## Hardware Introduction

### Front Panel

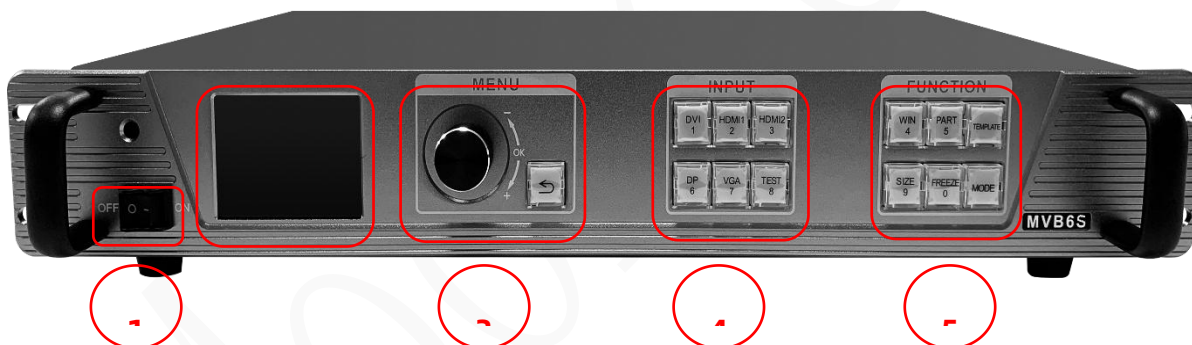

Front Panel Illustration			
#	Button	Illustration	
1	Power Button	Power on /Off the machine	
2	LCD	It displays the operation menu.	
3	Menu Button	Turn aside the button to select a certain menu, Escape button goes back to a certain menu.	
4	Input Source Ports	DVI	DVI Port/#1
		HDMI1	HDMI1Port/#2

		HDMI2	HDMI2 Port/#3
		DP	DP Port/#6
		VGA	VGA Port/#7
		TEST	Test Button/#8
5	Function Buttons	Win	Layer Selection/#4
		Part	Full or Partial Screen button/#5
		TEMPLATE	Multiple Templates
		SIZE	Adjust the Size/#9
		FREEZE	Freeze /Black Screen/#0
		MODE	Load Templates

## Backside Panel



Input Ports			
#	Name	QTY	Illustration
3	DVI	1	1920x1080/60HZ、3840*540/60HZ and EDID management.
	HDMI1	1	1920x1080/60HZ、3840*1080/60HZ and EDID Management.

	HDMI2	1	1920x1080/60HZ、3840*1080/60HZ and EDID Management.
	DP	1	1920x1080/60HZ、3840*2160/60HZ and EDID Management.
	VGA	1	1920x1080/60HZ and EDID Management.
Output Ports			
#	Port Type	QTY	Illustration
5	Ethernet Port	6	Port Type:RJ45 Transmission Speed: 1000BaseTX Supported Card: Mooncell All series receiving card and its multifunctional card.
Audio Port			
#	Port Type	QTY	Illustration
4	AUDIO IN	1	3.5mm Audio Input
	AUDIO OUT	1	3.5mm Audio Output
Control Port			
#	Port Type	QTY	Illustration
2	UPDATE	1	USB Upgrade Port
	USB	1	Sending Card Debug Port(configure Port) to be connected to the Autoled Software
	LAN1	1	100M Megabyte Port (Reserved Port)
	RS232	1	Serial Port
EXTENDED PORT			
#	Port Type	QTY	Illustration
1	SD Card	1	Install the SD card to store or save the configuration file of the screen.
Power Port			
#	Port Type	QTY	Illustration
6	Power Port	1	AC:100V~240V

**Dimensions:**



# 4 Product Specifications

## Specifications

Electric Parameters	Input Voltage	AC-100-240V-50/60HZ
	Rated Power	25W
Operating Environment	Operating Temperature	0℃ - 45℃
	Operating Humidity	10%RH-90%RH No Solidification
Dimensions	482.6 x 300.3x 66.7 mm( Length x Width x Height)	
Net Weight	3.9KG	
Packaging Dimensions	515×130×380mm	
Accessories	1×Certificate、1×DP Cable、1×HDMI Cable、1×DVI Cable、 1×USB2.0 Cable、1×Power Cable	

## Precautions

1. **High voltage danger:** The working voltage of this product is AC -100V ~ 240V.
2. It is forbidden to immerse conductive objects such as liquids and metal fragments into the equipment to avoid safety accidents.
3. Please use the equipment in a dry and clean environment.