

M10D

Receiving card

User Manual

Document version: V2.0

CONTENT

1 Update Records	1
2 Product Introduction	1
3 Product Characteristics	1
3.1 Improve the display effect	1
3.2 Improve maintainability	3
3.3 Function Customization	4
4 Product Appearance	5
4.1 Data Interface Description	6
4.2 Product Dimensions	6
4.3 Definition of Output Interface	7
5 product parameters	19
5.1 Basic parameters	19
5.2 Specification Parameters	19
6 Precautions	20

1 Update Records

Document Version	Hardware Version	Release Time	Update Record
V4.1	M10D (V2.0.2)	June 18(th), 2025	Hardware version update

2 Product Introduction

M10D is a receiving card designed for cinema LED displays independently developed and launched by Mooncell, with a maximum on-board resolution of $512 \times 512@60\text{Hz}$;

Support 18-bit, pixel-by-pixel chromaticity correction, low delay, RGB independent Gamma adjustment, 90 multiple rotation of the screen, serial number detection of the receiving card, configuration parameter readback and other functions to improve the screen display effect and user experience;

It uses 120PIN high-precision connector interface for communication, dust-proof and shockproof, and supports up to 32 sets of RGB parallel data. It integrates network transformers to simplify design and improve electromagnetic compatibility. It supports 12Bit video input. It uses internal frequency doubling function to double the frequency of movie format 3D 48HZ to 144HZ, and can also control the 3D glasses transmitter.

3 Product Characteristics

3.1 Improve the display effect

- 18bit

Enabling 18bit in the software can increase the gray scale of LED display screen by 4 times, effectively deal with the gray scale loss caused by brightness reduction of LED display screen, optimize the pitting problem caused by low gray, make the low gray transition natural, and make the image display more delicate.

- Automatically switch display effects

Automatic recognition of 24HZ or 48HZ video input, switching between different display schemes

- Support 12BIT

Support 12BIT video source input

- Frequency doubling function

Multiply the frequency of 3D video in movie format from 48HZ to 144HZ

- HDR

Support HDR10 and HLG two video source standards; with large-band independent master controller, input HDR10 standard or HLG standard video source, which can achieve greater brightness dynamic range and color space, greatly enhance the display image quality, and make the picture more delicate and real.

- Brightness correction by pixels

With the correction software, the brightness and chromaticity of each pixels of the large screen are corrected, which effectively eliminates the color difference, makes the brightness and chromaticity of the display screen highly consistent, and improves the image quality of the display screen.

- Low delay

Reduce the delay of the video source at the receiving card end, and the delay is as low as 1 frame (for the lamp board of the driving IC using built-in RAM).

- 3D

The 3D picture effect needs to be viewed with 3D glasses, and the format of the 3D signal is transmitted to the 3D glasses by connecting the 3D signal transceiver.

- RGB independent Gamma adjustment

With the independent master control and software supporting RGB independent Gamma adjustment, the problems such as uneven low gray and white balance drift of the display screen are effectively controlled by adjusting "red", "green" and "blue" respectively, making the picture more realistic.

3.2 Improve maintainability

- Receiving card serial number detection

With the network port debugging function in AutoLED software, the receiving card number and network port information will be displayed on the target box, and the user can know the position serial number and connection line of the receiving card.

- Data interface customization

With AutoLED software, the output data of the receiving card can be detected and edited.

- Complex structure box

In the advanced layout of AutoLED software, boxes can be arranged and constructed at will quickly.

- Construct complex large screen

In the complex display screen connection of AutoLED software, boxes can be arranged and constructed at will quickly.

- Communication monitoring

Monitor the working state of receiving card in real time on AutoLED.

- Error detection

On the AutoLED, the communication signal quality of the network cable connected with the system hardware can be monitored in real time, so as to quickly judge the quality of the network cable and troubleshoot.

- Configuration parameter readback

The configuration parameters of the current receiving card can be read back on the AutoLED. Read back the configuration parameters of the receiving card and save them locally.

- Loop backup


The network port is connected through the loop of the main and standby network cables to increase the reliability of the serial connection of the receiving cards. When one of the main and standby series lines fails, the other one can ensure the normal display of the screen.

- Dual power backup
Detect power status and feed back to the software
- Supports voltage detection
Support detecting the operating voltage of the receiving card.
- Support temperature detection
Support detecting the operating temperature of the receiving card.
- Support power detection
Support to detect the working condition of the power supply.

3.3 Function Customization

- Receiving card hot backup (need to be customized)
The device connected to the receiving card increases the reliability of the device operation through the main and standby backup mechanism. At a certain time, only the main device is running. When the main device fails, the standby device starts to work to ensure the normal display of the screen.
- Intelligent Module (need to be customized)
The intelligent module consists of Flash and MCU; Flash can store the correction coefficient. The MCU can communicate with the receiving card to realize the monitoring of the temperature, voltage and cable communication status at the module level. The intelligent module can make the monitoring user do not need to install a separate monitoring card, saving the box space
- Module automatic calibration (optional function)
After the lamp board is replaced, the new lamp board ID and correction factor will be automatically read when the receiving card is powered on, and saved in the receiving card Flash
- Support voltage detection (need to be customized)
- LCD module (need to be customized)
The LCD module is connected to the HUB board and is used to display the temperature, voltage, single run time and total run time of the receiving card.
- Support temperature detection (need to be customized)
Support detecting the operating temperature of the receiving card.

4 Product Appearance

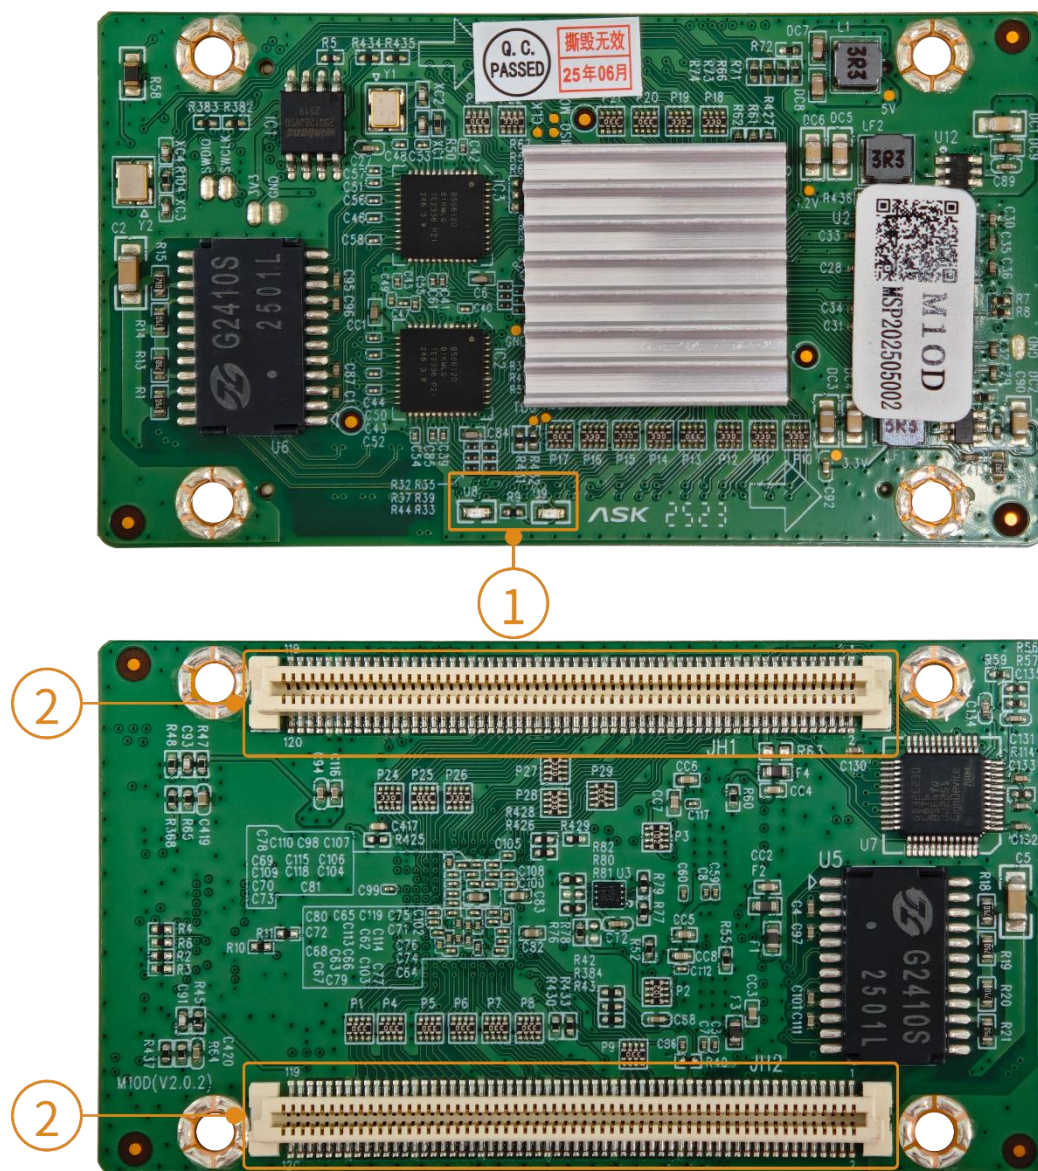


* Product photos are for reference only, please refer to the products actually purchased.

4.1 Data Interface Description

#	Interface name	Interface description	
1	Status indicator U9	Uniform slow flash	The receiving card works normally, the network cable is connected normally, and no DVI signal is input.
		Uniform flash	The receiving card works normally, the network cable is connected normally, and there is DVI signal input.
		Constant extinction	No gigabit network signal
		Flash 3 times at intervals	The receiving card works normally, the network cable loop is connected, and there is DVI signal input.
1	Power indicator U8	The red light is always on, which means the power supply is normal.	
2	communication interface	120PIN high-density plug-in interface	

4.2 Product Dimensions

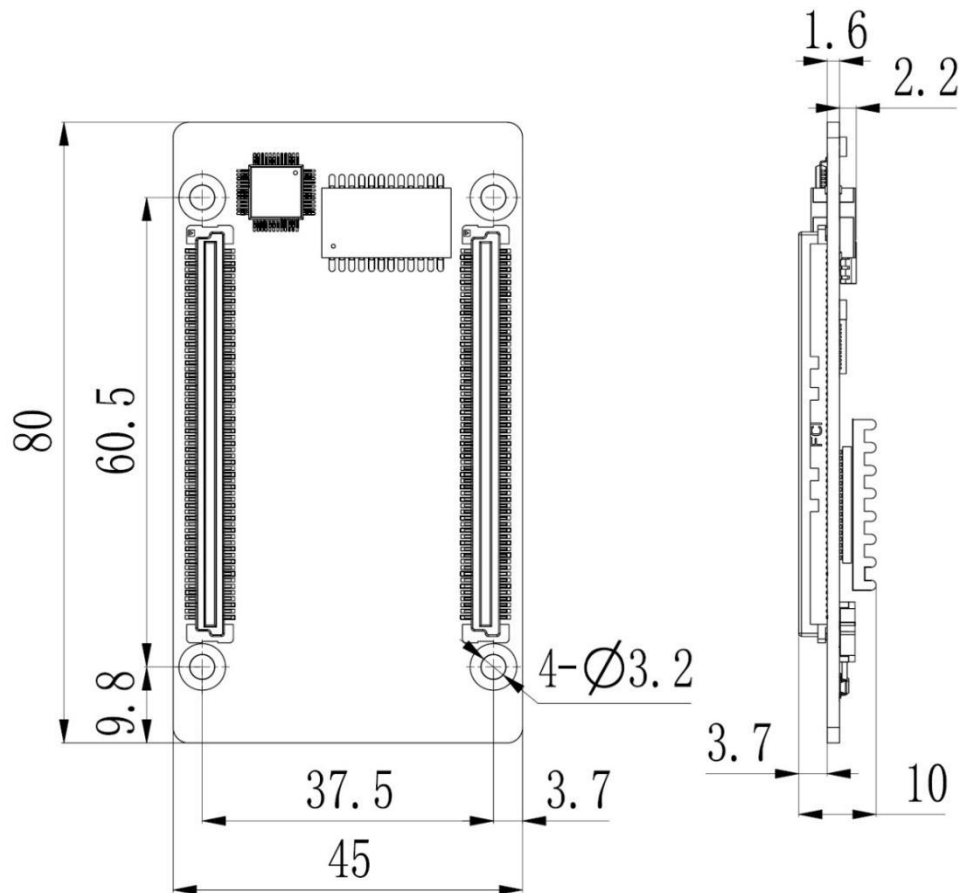


Tolerance: 0.3

Unit: mm

4.3 Definition of Output Interface

32 groups of parallel data interface definitions

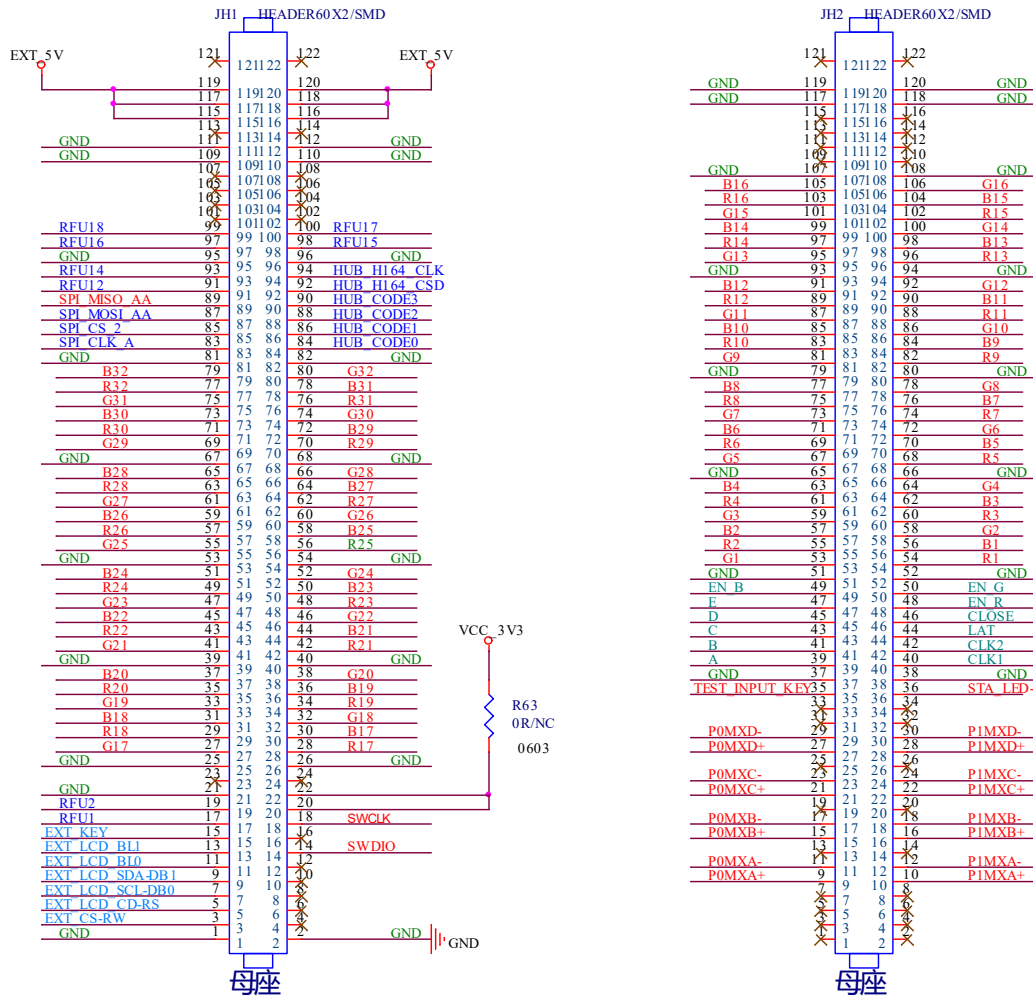

JH1 data interface definitions

Illustration	Definition	Pin	Pin	Definition	Illustration
	GND	1	2	GND	
LCD CS signal	EXT_CS_RW	3	4	NC	
LCD RS signal	EXT_LCD_CD_RS	5	6	NC	
LCD clock signal	EXT_LCD _SCL_DB0	7	8	NC	
LCD data signal	EXT_LCD _SDA_DB1	9	10	NC	

LCD backlight signal 1	EXT_LCD_BL0	11	12	NC	
LCD backlight signal 2	EXT_LCD_BL1	13	14	SWDIO	
LCD control button	EXT_KEY	15	16	NC	
/	RFU1	17	18	SWCLK	The series resistor is connected to 3.3V, the default is NC.
	RFU2	19	20	VCC_3V3	
	GND	21	22		
	NC	23	24	NC	
	GND	25	26	GND	
	G17	27	28	R17	
	R18	29	30	B17	
	B18	31	32	G18	
	G19	33	34	R19	
	R20	35	36	B19	
	B20	37	38	G20	
	GND	39	40	GND	
	G21	41	42	R21	
	R22	43	44	B21	
	B22	45	46	G22	
	G23	47	48	R23	
	R24	49	50	B23	
	B24	51	52	G24	
	GND	53	54	GND	
	G25	55	56	R25	
	R26	57	58	B25	
	B26	59	60	G26	
	G27	61	62	R27	
	R28	63	64	B27	

	B28	65	66	G28	
	GND	67	68	GND	
	G29	69	70	R29	
	R30	71	72	B29	
	B30	73	74	G30	
	G31	75	76	R31	
	R32	77	78	B31	
	B32	79	80	G32	
	GND	81	82	GND	
/	SPI_CLK_A	83	84	HUB_CO DE0	/
	SPI_CS_2	85	86	HUB_CO DE1	
	SPI_MOSI_AA	87	88	HUB_CO DE2	
	SPI_MISO_AA	89	90	HUB_CO DE3	
/	RFU12	91	92	HUB_H16 4_CSD	/
/	RFU14	93	94	HUB_H16 4_CLK	/
	GND	95	96	GND	
/	RFU16	97	98	RFU15	
/	RFU18	99	100	RFU17	
	NC	101	102	NC	
	NC	103	104	NC	
	NC	105	106	NC	
	NC	107	108	NC	

	GND	109	110	GND	
	GND	111	112	GND	
	NC	113	114	NC	
Input power VCC recommended 3.3V~ 5.5V	EXT_5V	115	116	EXT_5V	Input power VCC recommended 3.3V~ 5.5V
	EXT_5V	117	118	EXT_5V	
	EXT_5V	119	120	EXT_5V	
	NC	121	122	NC	

JH2 data interface definitions

Illustration	Definition	Pin	Pin	Definition	Illustration
	NC	1	2	NC	
	NC	3	4	NC	
	NC	5	6	NC	
	NC	7	8	NC	
Gigabit Ethernet port	P0 MXA+	9	10	P1 MXA+	Gigabit Ethernet port
	P0 MXA-	11	12	P1 MXA-	
	NC	13	14	NC	
	P0 MXB+	15	16	P1 MXB+	
	P0 MXB-	17	18	P1 MXB-	
	NC	19	20	NC	
	P0 MXC+	21	22	P1 MXC+	
	P0 MXC-	23	24	P1 MXC-	
	NC	25	26	NC	
	P0 MXD+	27	28	P1 MXD+	
	P0 MXD-	29	30	P1 MXD-	
	NC	31	32	NC	

	NC	33	34	NC	
test button	TEST_INPUT_KE Y	35	36	STA_LED -	Operating indicator (active at low level)
	GND	37	38	GND	
row decoded signal	A	39	40	CLK1	First shift clock output
row decoded signal	B	41	42	CLK2	Second Shift Clock Output
row decoded signal	C	43	44	LAT	latch signal output
row decoded signal	D	45	46	CLOSE	blanking control signal
row decoded signal	E	47	48	EN_R	Display enable (OE_R, G, B are not separated, when controlling, use OE_R)
Display enable (OE_R, G, B are not separated, when controlling, use OE_R)	EN_B	49	50	EN_G	
	GND	51	52	GND	
	G1	53	54	R1	
	R2	55	56	B1	
	B2	57	58	G2	
	G3	59	60	R3	
	R4	61	62	B3	
	B4	63	64	G4	
	GND	65	66	GND	
	G5	67	68	R5	
	R6	69	70	B5	
	B6	71	72	G6	
	G7	73	74	R7	
	R8	75	76	B7	

	B8	77	78	G8	
	GND	79	80	GND	
	G9	81	82	R9	
	R10	83	84	B9	
	B10	85	86	G10	
	G11	87	88	R11	
	R12	89	90	B11	
	B12	91	92	G12	
	GND	93	94	GND	
	G13	95	96	R13	
	R14	97	98	B13	
	B14	99	100	G14	
	G15	101	102	R15	
	R16	103	104	B15	
	B16	105	106	G16	
	GND	107	108	GND	
	NC	109	110	NC	
	NC	111	112	NC	
	NC	113	114	NC	
	NC	115	116	NC	
	GND	117	118	GND	
	GND	119	120	GND	
	NC	121	122	NC	

96 sets of serial data interfaces

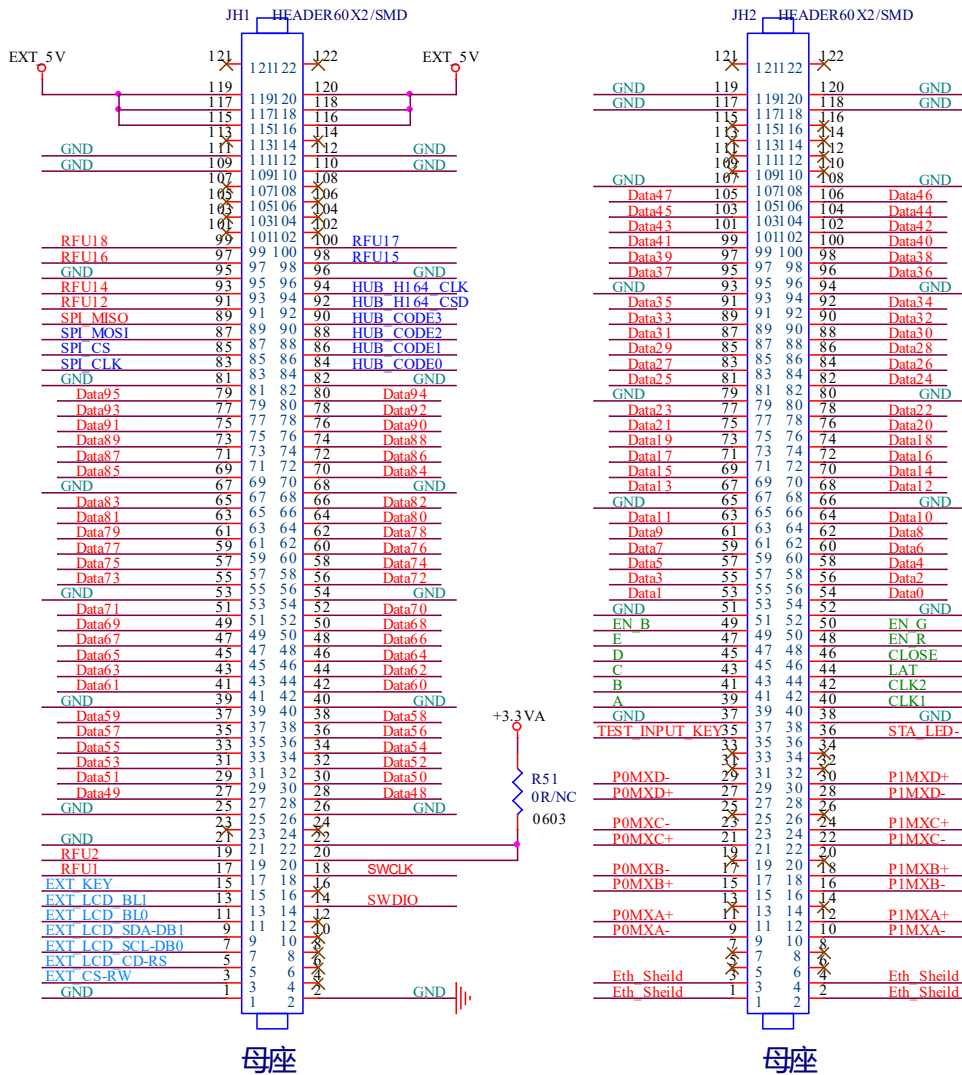

JH1 Definition

Illustration	Definition	Pin	Pin	Definition	Illustration
	GND	1	2	GND	
LCD CS signal	EXT_CS_RW	3	4	NC	
LCD RS signal	EXT_LCD_CD_RS	5	6	NC	
LCD clock signal	EXT_LCD_SCL_DB0	7	8	NC	
LCD data signal	EXT_LCD_SDA_DB1	9	10	NC	
LCD backlight signal 1	EXT_LCD_BL0	11	12	NC	
LCD backlight signal 2	EXT_LCD_BL1	13	14	SWDIO	

LCD control button	EXT_KEY	15	16	NC	
/	RFU1	17	18	SWCLK	
	RFU2	19	20	VCC_3V3	The series resistor is connected to 3.3V, the default is NC.
	GND	21	22		
	NC	23	24	NC	
	GND	25	26	GND	
	Data49	27	28	Data48	
	Data51	29	30	Data50	
	Data53	31	32	Data52	
	Data55	33	34	Data54	
	Data57	35	36	Data56	
	Data59	37	38	Data58	
	GND	39	40	GND	
	Data61	41	42	Data60	
	Data63	43	44	Data62	
	Data65	45	46	Data64	
	Data67	47	48	Data66	
	Data69	49	50	Data68	
	Data71	51	52	Data70	
	GND	53	54	GND	
	Data73	55	56	Data72	
	Data75	57	58	Data74	
	Data77	59	60	Data76	
	Data79	61	62	Data78	
	Data81	63	64	Data80	
	Data83	65	66	Data82	
	GND	67	68	GND	

	Data85	69	70	Data84	
	Data87	71	72	Data86	
	Data89	73	74	Data88	
	Data91	75	76	Data90	
	Data93	77	78	Data92	
	Data95	79	80	Data94	
	GND	81	82	GND	
/	SPI_CLK_A	83	84	HUB_CO DE0	/
	SPI_CS_2	85	86	HUB_CO DE1	
	SPI_MOSI_AA	87	88	HUB_CO DE2	
	SPI_MISO_AA	89	90	HUB_CO DE3	
	RFU12	91	92	HUB_H1 64_CSD	
	RFU14	93	94	HUB_H1 64_CLK	
	GND	95	96	GND	
/	RFU16	97	98	RFU15	
	RFU18	99	100	RFU17	
	NC	101	102	NC	
	NC	103	104	NC	
	NC	105	106	NC	
	NC	107	108	NC	
	GND	109	110	GND	
	GND	111	112	GND	

	NC	113	114	NC	
Input power VCC recommended 3.3V~ 5.5V	EXT_5V	115	116	EXT_5V	Input power VCC recommended 3.3V~ 5.5V
	EXT_5V	117	118	EXT_5V	
	EXT_5V	119	120	EXT_5V	
	NC	121	122	NC	

JH2

Illustration	Definition	Pin	Pin	Definition	Illustration
	NC	1	2	NC	
	NC	3	4	NC	
	NC	5	6	NC	
	NC	7	8	NC	
Gigabit Ethernet port	P0 MXA+	9	10	P1 MXA+	Gigabit Ethernet port
	P0 MXA-	11	12	P1 MXA-	
	NC	13	14	NC	
	P0 MXB+	15	16	P1 MXB+	
	P0 MXB-	17	18	Port2_B-	
	NC	19	20	NC	
	P0 MXC+	21	22	P1 MXC+	
	P0 MXC-	23	24	P1 MXC-	
	NC	25	26	NC	
	P0 MXD+	27	28	P1 MXD+	
	P0 MXD-	29	30	P1 MXD-	
	NC	31	32	NC	
	NC	33	34	NC	
Test Button	TEST_INPUT_KEY	35	36	STA_LED-	Operating indicator (active at low level)
	GND	37	38	GND	
row decoded signal	A	39	40	CLK_1	First shift clock output

row decoded signal	B	41	42	CLK_2	Second Shift Clock Output
row decoded signal	C	43	44	LAT	latch signal output
row decoded signal	D	45	46	CLOSE	blanking control signal
row decoded signal	E	47	48	EN_R	Display enable (OE_R, G, B are not separated, when controlling, use OE_R)
Display enable (OE_R, G, B are not separated, when controlling, use OE_R)	EN_B	49	50	EN_G	
	GND	51	52	GND	
	Data1	53	54	Data0	
	Data3	55	56	Data2	
	Data5	57	58	Data4	
	Data7	59	60	Data6	
	Data9	61	62	Data8	
	Data11	63	64	Data10	
	GND	65	66	GND	
	Data13	67	68	Data12	
	Data15	69	70	Data14	
	Data17	71	72	Data16	
	Data19	73	74	Data18	
	Data21	75	76	Data20	
	Data23	77	78	Data22	
	GND	79	80	GND	
	Data25	81	82	Data24	
	Data27	83	84	Data26	

	Data29	85	86	Data28	
	Data31	87	88	Data30	
	Data33	89	90	Data32	
	Data35	91	92	Data34	
	GND	93	94	GND	
	Data37	95	96	Data36	
	Data39	97	98	Data38	
	Data41	99	100	Data40	
	Data43	101	102	Data42	
	Data45	103	104	Data44	
	Data47	105	106	Data46	
	GND	107	108	GND	
	NC	109	110	NC	
	NC	111	112	NC	
	NC	113	114	NC	
	NC	115	116	NC	
	GND	117	118	GND	
	GND	119	120	GND	
	NC	121	122	NC	

5 product parameters

5.1 Basic parameters

Three-wire Parallel (RGB)	Drive IC	Brightness Correction Band Load (pixel)	Chromaticity Correction Band Load (pixel)
32 Groups	512×512	512×512	384×512
Number of cascaded cards		Support scanning lines	
≤1000PCS		1-128 sweep	

Frequency Doubling Mode Bandload

Three-wire Parallel (RGB)	Drive IC	Brightness Correction Band Load (pixel)	Chromaticity Correction Band Load (pixel)
32 Groups	384×256	384×256	384×256
Number of cascaded cards		Support scanning lines	
≤1000PCS		1-128 sweep	

5.2 Specification Parameters


Electrical parameters	Input voltage	DC3.5~5.5V
	Rated current	0.6A
	Rated power	3W
Working environment	Working temperature	-20°C~70°C
	Working humidity	10%RH~90%RH has no condensation.
Storage environment	Temperature	-40°C~85°C
Board size	80mm×45mm	
Net weight	22.8g Description: Weight of single card	
Outer packing size	490×335×120mm	

Gross weight of product	3.5 Kg Description: Including wire, accessories
Single Card with plastic Holder	106g
Pack Mode	100PCS /box
Certificate Information	Comply with RoHS standards and CE-EMC standards.

* Current and power consumption may vary according to different factors such as product usage, environment and settings.

6 Precautions

- The installation process must be completed by professionals.
- Must be antistatic.
- Please pay attention to waterproof and dust removal.

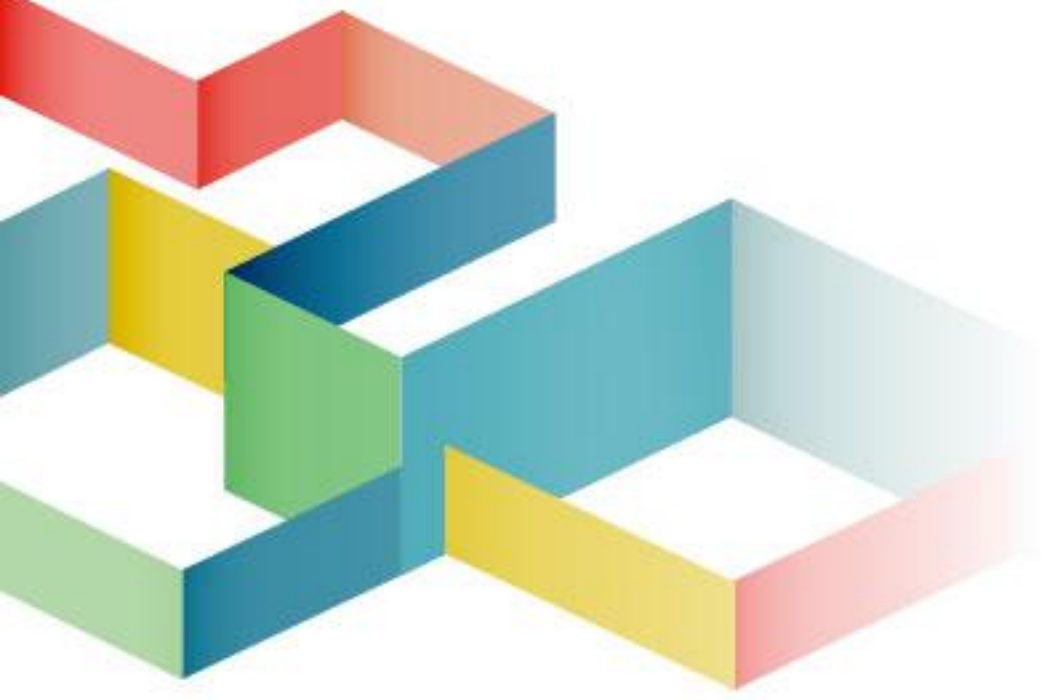

National after-sales service hotline: 400-881-3531

Official website: www.mooncell.com.cn.

Address: Mooncell Building, No.3 Industrial Zone, Baoshi South Road,
Shiyan Street, Baoan District, Shenzhen

