



KS204

Video Linkage Player Series

Specification 4.0



CONTENT

1 Update Records	1
2 Product Introduction	1
3 Product Characteristics	2
3.1 Input and Output Interface	2
3.2 Diversified functions	2
4 Application Scenarios	2
5 Function Introduction	3
5.1 Features	3
5.2 Format Requirements for signal source	4
5.3 Device Management	4
5.4. V3.0 DMX 512 Channels Illustration	4
5.5 Using the USB Flash Drive to Import the materials	9
6 Product Appearance	10
6.1 Data Interface Illustration	10
6.2Front Panel Button	11
6.3 Dimensions	16
7 Product Parameters	17
7.1Basic Parameters	17
7.2 Specification	17
8 Precautions	17

1 Update Records

Document Version	Hardware Version	Release Time	Update Record
V4.0	KS204 (V1.0.0)	August 19(th), 2025	First release

2 Product Introduction

KS204 features a high-performance multi-core processor with a main frequency of 1.8G, onboard 4G RAM, and 64G EMMC internal storage. It has powerful image processing capabilities and H264\H265 high-definition video hardware decoding capabilities.

KS204 integrates video processing and LED sending card, supports 4x Gigabit network port outputs, with a maximum load of 2.6 million pixels, it is suitable for KTV, party rooms, bars, etc.

It supports the standard DMX512 lighting protocol, supports sounds and audio detection, automatically switches scene materials, and uniformly schedules lighting, music, and video images to create an immersive atmosphere.



3 Product Characteristics

3.1 Input and Output Interface

- Input Interfaces
 - Supports 2 HDMI IN inputs, capable of overlaying Android screens
- Output Interfaces
 - Supports 1 HDMI OUT output
 - 4×LED network port outputs
 - Supports screen splicing and synchronized playback

3.2 Diversified functions

- Supports high-definition video and image playback, with zoom, picture-in-picture, and picture-out-of-picture functions
- Supports PC connection for web-based management settings, offering flexible and convenient operation
- Compatible with karaoke machines and smart control systems from various manufacturers
- Features panel button scene switching, audio detection, and DMX512 control capabilities
- Embedded hardware architecture ensures stable operation and low power consumption

4 Application Scenarios

KS204 is an all-in-one KTV video linkage player that serves as the core component of a comprehensive KTV display control system. Supporting the standard DMX512 lighting protocol and enabling automatic scene material switching, it delivers smarter and more dazzling screen displays for KTV rooms.

KS204 switches between corresponding scene modes via wall panel buttons or DMX512 commands, synchronizing video, music, and lighting in each mode to create an immersive audiovisual experience. It offers significant advantages for LED screens in KTV rooms, bars, and nightclubs.

5 Function Introduction

5.1 Features

- Built-in 64GB EMMC internal storage with preloaded multi-scenario content, auto-runs upon startup
- Supports Gigabit Ethernet connectivity
- 1× HDMI OUT output, 4× LED network port display outputs
- Full-screen scaling up to 15360 horizontal and 15360 vertical resolution
- Supports HDMI input + foreground + background, multi-layer overlay, picture-in-picture (PIP) and picture-outside-picture (POP) modes
- External karaoke machine input via HDMI enables PIP display on screen, with signal source switching support
- WEB-based visual operation allows custom window sizing/positioning and media library management
- Supports flexible window combinations, with up to 12 playback windows
- Supports 5D slicing for 5D Image Fusion
- Supports window transparency settings
- Supports overlay playback of text, images, and videos with seamless video transitions
- Features multiple playback modes including loop playback and command-based playback
- Supports screen brightness and RGB color adjustment
- Supports various video effects including rotation at any angle, scaling, strobing, tiling, and speed adjustment
- Supports USB drive updates for media files with three copy methods: overwrite, clear, or append
- Supports standard DMX512 lighting protocol for integration with song selection systems, enabling synchronized video, music, and lighting control
- Supports manual switching between various scene modes via mobile app or wall panel

5.2 Format Requirements for signal source

Video Format	MP4
Video Coding	H.264/H.265
Video Frame Rate	Recommended: 30fps
Video Resolution	Recommended:1920*1080
Video Bit Rate	Max Video Rate: 20000bps
Picture Format	JPG、JPEG、PNG,etc.

5.3 Device Management

Network Communication	LAN
Program Updating	Network or USB Flash Drive
Terminal Device	PC or other Intelligent Terminal Devices
Software Management	The device comes with a web sever, and the terminal can access the device through a browser

5.4. V3.0 DMX 512 Channels Illustration

V3.0 Channel Table, corresponding to player version 9.3.1.XX

#	Function	Channel Value	Illustration
1	Foreground Folder	1~255	Select the foreground directory, corresponding to 001~255 folders, 0 is empty.Channels 1 and 3 cannot be 0 at the same time, and the 51 directory is to remove the black background.
2	Foreground Folder	0	Randomly play the materials in the folder (no matter what mode the web is set to)
		1~255	Uni cast mode: the specified material is played in a loop Sequential mode: play the material with the specified value first, and then play other materials in sequence Random mode: play the material with the specified value first, and

			then play other materials randomly
3	Background Folder	1~255	Select the foreground directory, corresponding to 001~255 folders, 0 is empty.Channels 1 and 3 cannot be 0 at the same time, and the 51 directory is to remove the black background.
4	Background Material	0	Randomly play the materials in the folder (no matter what mode the web is set to)
		1~255	Uni cast mode: the specified material is played in a loop Sequential mode: play the material with the specified value first, and then play other materials in sequence Random mode: play the material with the specified value first, and then play other materials randomly
5	Background Light Adjustment	0~255	0: turn off the light, 1~255 increases the brightness proportionally, 255: maximum
6	Background Light Adjustment	0~255	0: turn off the light, 1~255 increases the brightness proportionally, 255: maximum
7	Strobe	0~255	0: Off, 1-32 All, 33-64 Foreground, 65-96 Background: Proportionally increase the stroboscopic speed, (the slowest is 1 frame/s, the fastest is 30 frames/s)
8	RED	0~254	Brightness adjustment of red color during playback, 0: no red
		255	The entire led screen is pure red
9	GREEN	0~254	Brightness adjustment of green color during playback, 0: no green
		255	The entire led screen is pure green
10	BLUE	0~254	Brightness adjustment of blue color during playback, 0: no blue

		255	The entire led screen is blue
11	Play Speed	All	0-10: normal, 11-20:2 times speed, 21-30:1.5 times speed, 31-40:0.8 times speed, 41-50:0.5 times speed, 51-60: suspended
		Foreground	0-10: normal, 11-20:2 times speed, 21-30:1.5 times speed, 31-40:0.8 times speed, 41-50:0.5 times speed, 51-60: suspended
		Background	0-10: normal, 11-20:2 times speed, 21-30:1.5 times speed, 31-40:0.8 times speed, 41-50:0.5 times speed, 51-60: suspended
12	PIP	0 21~30	No window
		1~10 41~50	Enable the HDMI window of the HDMI OUT1 port
		11~20 51~60	Enable the HDMI window of the HDMI OUT2 port
		31~40 250~255	Simultaneously enable the HDMI window of the HDMI OUT1/OUT2 port
		61~249	Current Status: Closed
13	Scaling(ZOOM)	0	Original Resolution(scale):(window is not scaled)
		1~50	Enlarged (Zoom IN), 1-10: The image is enlarged to scale, up to 3 times. 11-20: The image is scaled down to a minimum of 1 pixel. 21-30: The video is rolled back to the original window ratio of 1 pixel. The larger the value, the faster the rollback speed. 31-40: After the original scale of the video is enlarged by 3 times, the scale is rolled back. The larger the value, the faster the rollback speed. 41-50: The video is scaled back after 1 pixel is enlarged by 3 times. The larger the value, the faster the rollback speed.

		51~100	ZOOM OUT, 51-60: The foreground image is scaled up to 3x. 61-70: The foreground image is scaled down to a minimum of 1 pixel. 71-80: The foreground video is rolled back in a ratio of 1 pixel to the original window. The larger the value, the faster the rollback speed. 81-90: The original scale of the foreground video is rolled back after being enlarged by 3 times. The larger the value, the faster the rollback speed. 91-100: The foreground video is scaled back after 1 pixel is enlarged by 3 times. The larger the value, the faster the rollback speed.
		101~150	Zoom Out dynamically, 101-110: The background image is scaled up to 3x. 110-120: The background image is scaled down to a minimum of 1 pixel. 121-130: The background video is rolled back to the original window ratio of 1 pixel. The larger the value, the faster the rollback speed. 131-140: The original scale of the background video is rolled back after being enlarged by 3 times. The larger the value, the faster the rollback speed. 141-150: The background video is scaled back after 1 pixel is enlarged by 3 times. The larger the value, the faster the rollback speed.
14	Rotation	0	Normal
		1~40	1-10: Rotation from 0 ° to 360 ° (static) 11-20: 0 ° ~ 360 ° rotate clockwise, the larger the value, the faster the speed 21-30: 0 ° ~ 360 ° rotate counterclockwise, the larger the value, the faster the speed 31-40: 0 ° ~ 360 ° Rotate 1 turn clockwise and then 1 turn counterclockwise (repeat), the larger the value, the faster the speed.
		41~90	41-50: No rotation 51-60: Rotation from 0 ° to 360 ° (static) 61-70: 0 ° ~ 360 ° rotates clockwise, the larger the value, the faster the speed. 71-80: 0 ° ~ 360 ° rotate counterclockwise, the larger the value, the faster the speed 81-90: 0 ° ~ 360 ° Rotate 1 turn clockwise and then 1 turn counterclockwise (repeat), the larger the value, the faster the speed.

		91~140	91-100: No rotation 101-110: Rotation from 0 ° to 360 ° (static) 111-120: 0 ° ~ 360 ° rotates clockwise, the larger the value, the faster the speed 121-130: 0 ° ~ 360 ° counterclockwise rotation, the larger the value, the faster the speed 131-140: 0 ° ~ 360 ° rotate 1 turn clockwise and then 1 turn counterclockwise (static), the larger the value, the faster the speed
15	Tiling	1-16	1: Tile matrix 1x2 2: Tile matrix 1x3 3: Tile matrix 1x4 4: Tile matrix 2x1 5: Tile matrix 2x2 6: Tile matrix 2x3 7: Tile matrix 2x4 8: Tile matrix 3x1 9: Tile matrix 3x2 10: Tile matrix 3x3 11: Tile matrix 3x4 12: Tile matrix 4x1 13: Tile Matrix 4x2 14: Tile Matrix 4x3 15: Tile Matrix 4x4 16: Full Off
		17-32	17: Tile matrix 1x2 18: Tile matrix 1x3 19: Tile matrix 1x4 20: Tile matrix 2x1 21: Tile matrix 2x2 22: Tile matrix 2x3 23: Tile matrix 2x4 24: Tile matrix 3x1 25: Tile matrices 3x2 26: Tile matrices 3x3 27: Tile matrices 3x4 28: Tile matrices 4x1 29: Tile Matrix 4x2 30: Tile Matrix 4x3 31: Tile Matrix 4x4 32: Full Off
		33-48	33: Tile matrices 1x2 34: Tile matrices 1x3 35: Tile matrices 1x4 36: Tile matrices 2x1 37: Tile matrices 2x2 38: Tile matrices 2x3 39: Tile matrices 2x4 40: Tile matrices 3x1 41: Tile matrix 3x2 42: Tile matrix 3x3 43: Tile matrix 3x4 44: Tile matrix 4x1 45: Tile Matrix 4x2 46: Tile Matrix 4x3 47: Tile Matrix 4x4 48: Full Off
16	Audio switching	0~255	0: Available wall panel control 1-10: Switch VOD channel 11-20: Switch DJ channel
17	Special	0	closed

	effects	1-20	1-10: From slow to fast, top left to bottom right jitter 11-20: Random jitter from slow to fast 41-50: Slide left to right to enter, slow to fast to enter, and then stop after bouncing 51-60: Slide left to right to enter, slow to fast to enter, bounce and loop
		21-80	21-30: Slide from right to left to enter, slow to fast to enter, and then stop after bouncing 31-40: Slide from right to left to enter, slow to fast to enter, bounce and loop 41-50: Slide left to right to enter, slow to fast to enter, and then stop after bouncing 51-60: Slide left to right to enter, slow to fast to enter, bounce and loop 61-70: Slide from top to bottom to enter, slow to fast to enter, and then stop after bouncing 71-80: Slide from top to bottom to enter, slow to fast to enter, bounce and cycle
		81-120	81-90: Page rotation from left to right center, slow to fast page 360 and then stop 91-100: Turn the page from left to right center, turn the page from slow to fast 360 and cycle 101-110: Page rotation from right to left center, slow to fast page 360 and then stop 111-120: Turn pages from right to left center, turn pages from slow to fast 360 and cycle
18	Screen Running Group	0~100	The higher the number, the faster it is.
19	Screen Slicing	0~50	1-10, 11-20, 21-30, 31-40, 41-50, five groups
20	Reserved		

5.5 Using the USB Flash Drive to Import the materials

Create a third-level folder in the root directory of the USB Flash Drive:

- 1、MBBox/ktv/XXX
- 2、MBBox/ktv_add/XXX
- 3、MBBox/ktv_clear/XXX

Note: Ktv、ktv_add、ktv_clear folders,among them only one of three can be chosen, and they cannot exist at the same time.

The XXX folder name is 001~255, copy the material files into the corresponding XXX folder

Three ways to import:

ktv (overwrite copy): the material in the USB Flash Drive directory will overwrite the same material in the corresponding directory of KS204

ktv_clear (clear copy): If there is XXX directory in the USB Flash Drive, clear the corresponding directory of KS204, and then copy the material

ktv_add (add copy): If there is a YY file in the XXX directory in the USB Flash Drive, and there is a file with the same name in the corresponding directory of KS204, a number will be added in front of the same file name in the USB Flash Drive, and then copied, without affecting the original material

6 Product Appearance

Rear Panel



*Product images are for reference only. The actual product shall prevail upon purchase.

6.1 Data Interface Illustration

Name	Illustration
100-220V AC Power	Input Power Interface: AC 100-220V, 50/60Hz
LAN	Gigabit Ethernet Network Access
USB	USB 3.0 × 2, supports external USB drives, mouse, and other devices
HDMI IN	2 HDMI Inputs
HDMI OUT	1 HDMI Output, each supporting 1920×1080P resolution

Network Port	4 Gigabit Ethernet ports
DMX512 Interface	2*RJ45 ports (568B standard) for direct connection to KTV smart control systems, enabling audio-visual synchronization
RS485 Interface	2*RJ45 ports (568B standard) for connecting to wall panels to switch scenes
TTL Interface	1*RJ45 port (568B standard) for connecting to wall panels to switch scenes
Audio Input/Output	2 sets of audio input/output interfaces: Set 1: VOD audio input: RCA, audio output: RCA Set 2: DJ audio input: RCA, audio output: RCA Shared RCA output connects to smart control audio interface for real-time audio monitoring, enabling audio-visual synchronization.

Front Panel



*Product images are for reference only. The actual product shall prevail upon purchase.

6.2 Front Panel Button



Name	Indicator Light Explanation
Add	Increase Value
Subtract	Decrease Value
Menu	Function Selection Key
Confirm	After selecting a function and setting value, press the confirmation key to save
Exit	Exit Function Selection

Menu 1: dmx512 address



Control the start address of the dmx512 channel by addition and subtraction

Menu 2: Filter Frame Number



Set dmx512 filter frame data, the default is 3.

Menu 3: DHCP Settings

Entering the menu will automatically cycle the ip display (the ip obtained when powered on needs to be re-acquired if there is an update). The first data 01 represents static, and 00 represents dynamic.

The following figure shows the static IP 192.168.1.100



Enter the settings interface through addition and subtraction



0: Open DHCP; 1: Disable DHCP ; 2: Get the IP.

Menu 4: Log Save Settings



1 is not saved, 0 to save

Menu 5: HDMI IN Selection and Status



1. Press the F menu to display 1, which means that HDMI IN 1 is currently plugged in. If it displays 2, it means that HDMI IN 2 is currently plugged in.
2. When the HDMI IN of the device is only plugged into one signal, the device will automatically select the one with the signal to display. When both HDMI IN channels of the device are plugged in, you need to select 1 or 2 through the menu and then press Confirm to select.

Menu Six: G Menu Drum Coefficient



Set drum source data coefficient, default

Menu 7: H Menu Drum Data

H menu drum data minimum, default 40

Menu 8: I Menu Drum Data



I menu drum data maximum, default 140

Menu 9: J Menu Drum Data



J menu MCU status Displays the status code according to different configurations, and does not need to be adjusted


Menu 10: K Menu DB Settings



K menu db setting value sets to smaller or negative, the default is 3.

6.3 Dimensions

Unit :MM

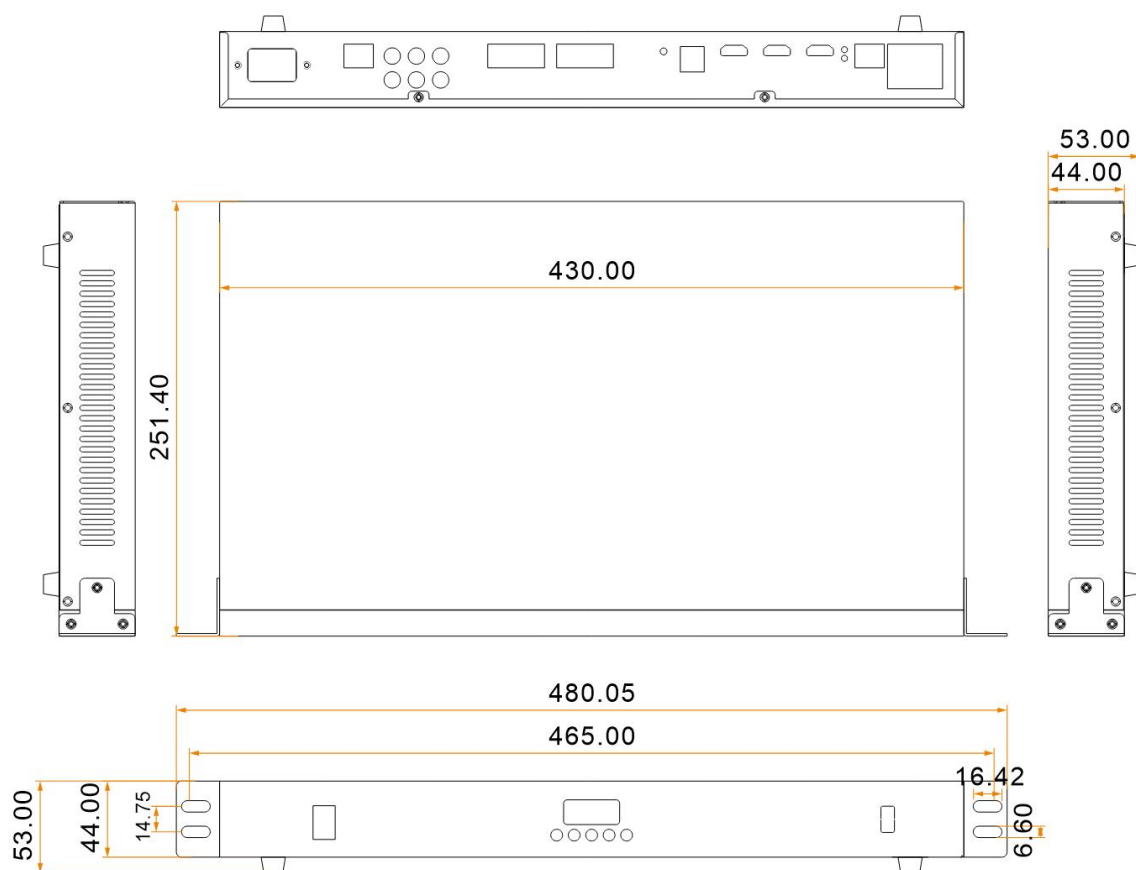

Tolerance: ± 0.3 Unit: mm

7 Product Parameters

7.1 Basic Parameters


Loading Capacity	Single Port	650000 Pixels
	Whole Unit	2.6 Million Pixels
Performance Parameters	High-performance CPU + GPU RAM: 4GB DDR3 high-speed memory Internal storage: 64GB eMMC high-speed storage	
Network Access Method	Gigabit Ethernet	
Video Interface	2×HDMI inputs, 1×HDMI output, 4×LED Ethernet ports	
USB Interface	2×USB (3.0)	

7.2 Specification

Electric Parameters	Rated Voltage	AC-100-240V-50/60HZ
	Rated Power	11W
Working Environment	Working Temperature	-20°C - 70°C
	Working Humidity	10%RH-90%RH No solidification
Dimensions	Unit Dimensions: 480.05 x 251.4 x 53 mm	
Net Weight	2.84Kg	
Packing Information	Accessory	1×HDMI cable, 1×power cord, 1×network cable, 1×audio cable, 1×certificate of conformity
	Packing Box	515×130×355mm
	Gross weight	3.96kg
	Packing method	3 PCS/box

8 Precautions

- High voltage hazard: This product operates at AC 100V~240V.
- Do not allow liquids or metal fragments and other conductive materials to enter the device, to prevent safety accidents.
- Please use the device in a dry and clean environment.

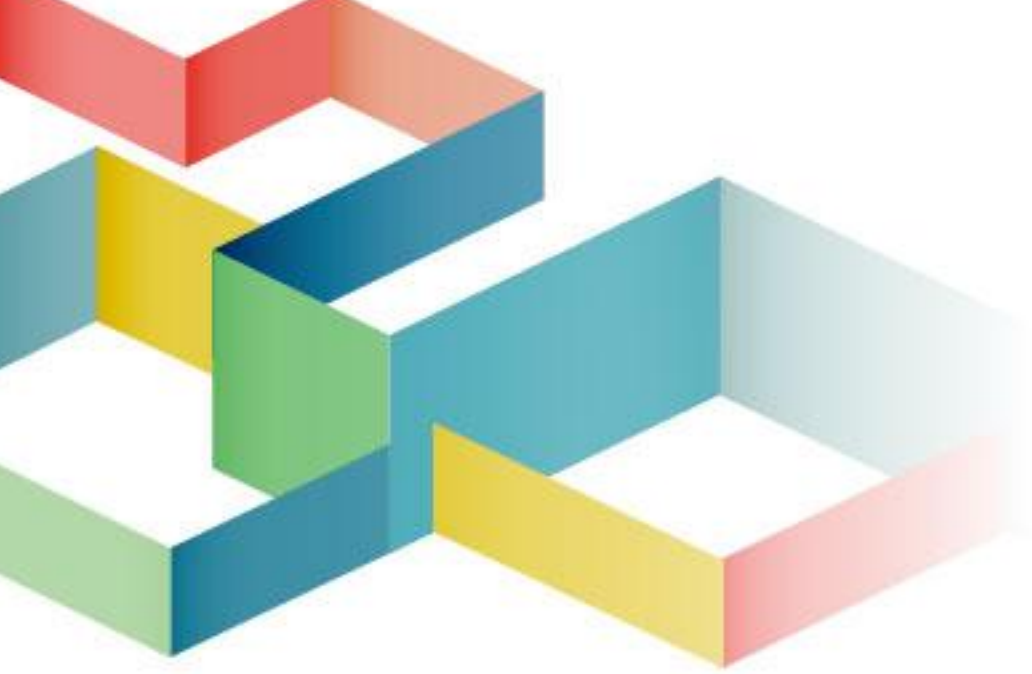

National after-sales services hotline: 400-881-3531

Official website: www.mooncell.com.cn

Address: Mooncell Building, Third Industrial Zone, Baoshi South Road,
Shiyan Street, Baoan District, Shenzhen

