

Mooncell Smoke & Fog Sensor Specification

SSD100

Add: 1st Floor of the Comprehensive Building, Baoshi South Road, Shiyan Town, Baoan
District, Shenzhen, PRC
Tell: 0755-23975634 29095400

➤ **Introduction:**


The Smoke&Fog Sensor SSD100 is a product that produced by Mooncell to be used together with Mooncell Multifunctional Card M-MFN02.

➤ **Features:**

1. To monitor the Smoke&Fog Values of the environment.
2. To be connected to the Multifunctional Card MFN02.
3. It features a cable with 1.5m long.
4. There is no need to get it connected to any external power supplies.

➤ **Dimensions:**

Size: 65.6MMx45MMx28MM (Length x Width x Height)。

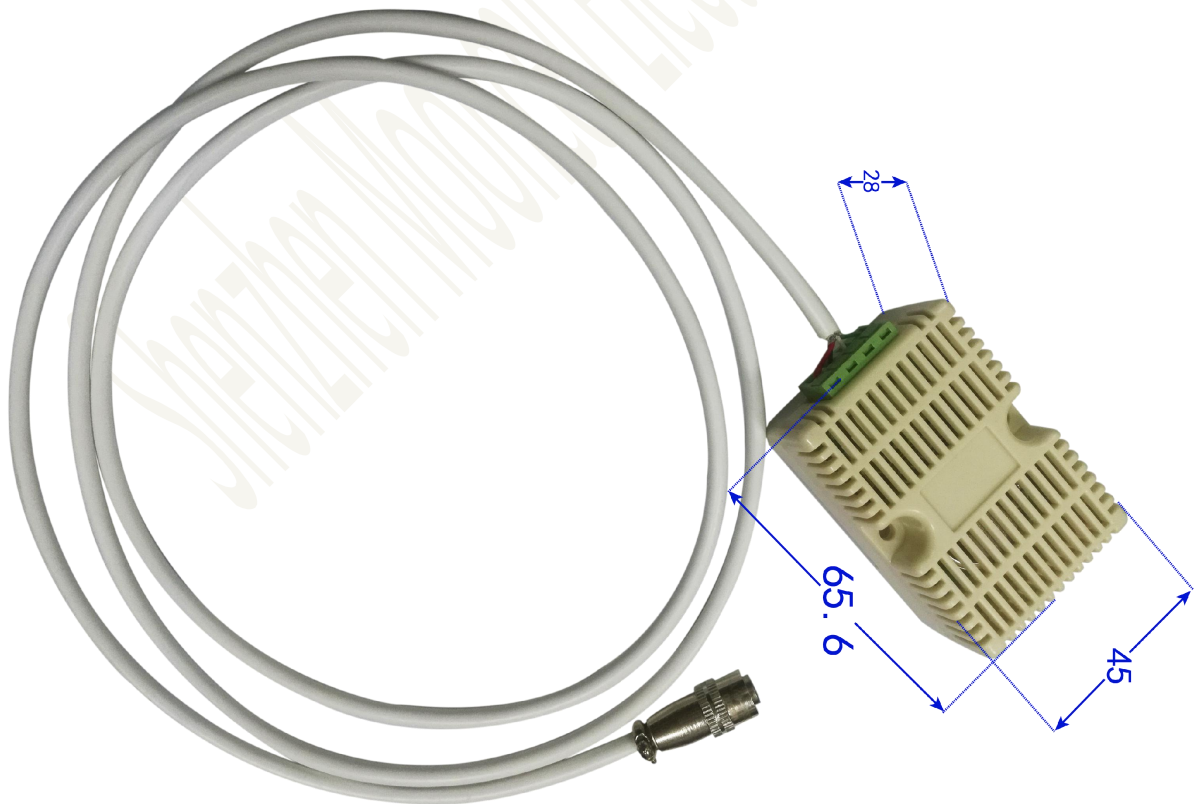

➤ Parameters:

Model	SSD100
Rated Voltage	5.0V
Smoke&Fog Measurement Range	0 ppm-100ppm
Working Environment Temperature	-20°C-70°C
Working Environment Humidity	5%-95%
Cable Length	1.5M
Net Weight	33.6g

➤ Packaging:

Item Name	Produce Model	Quantity
Smoke&Fog Sensor	SSD100	1PCS